

# Fluid Transfer



## Booster Silent 3M



### Benefits

- Equipped with an electronic safety device that protects the pump from dry-running
- Built-in non return valve
- Designed to automatically Start and Stop the pump when taps are opened or closed
- Automatic and manual reset
- Constant pressure and flow rate
- Supplied with power cable with plug

	Booster Silent 3 M	Booster Silent 4 M	Booster Silent 5 M
Voltage 50 Hz	1 x 230 V	1 x 230 V	1 x 230 V
P2 Nominal	kW	0,55	0,75
	HP	0,75	1
Ø DNA - DNM	1"	1"	1"
Cable m	2	2	2
Q m <sup>3</sup> /h	0,6 - 4,2	0,6 - 4,2	0,6 - 4,2
H (m)	33-10	43-13	52-16

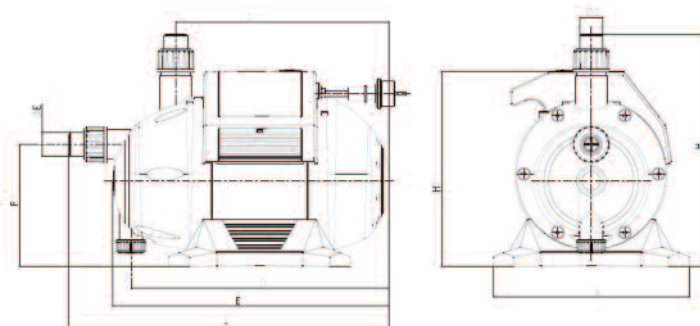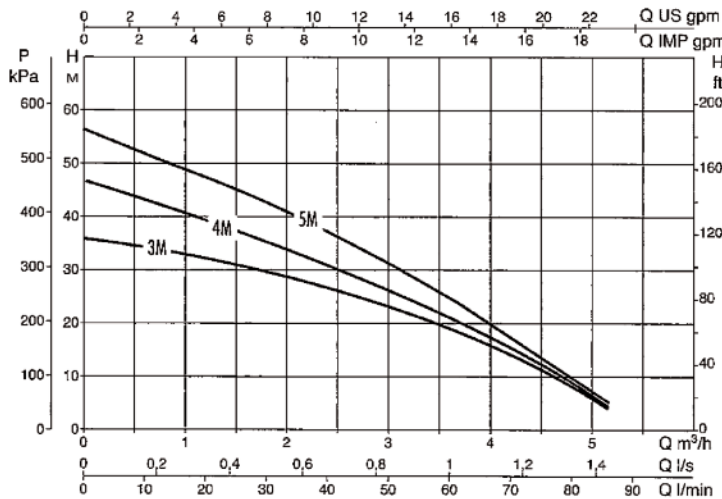

	Booster Silent 3 M	Booster Silent 4 M	Booster Silent 5 M
A	455	455	455
B	280	280	280
C	305	305	305
D	370	370	370
E	395	395	395
F	175	175	175
ØG	33	33	33
H	330	330	330
H1	280	280	280