Fluid Transfer



Pond Skimmer



Benefits

- Through a two-part telescopic tube it is infinitely height adjustable.
- In addition the float automatically bridges water level differentials up to 160 mm, which can easily occur due to rainfall or strong evaporation.
- The height of the Tower Surface Skimmer can be adjusted simply, and the adjustment does not require tools. The lower part of the tube has a telescopic nut for convenient adjustment. Even adapting to low water levels is possible.
- A smaller tube diameter means less air content and thus prevents the surface skimmer from floating.

Description

The Tower Surface Skimmer powerfully and effectively removes debris that floats on the water surface from the garden pond. Dust, leaves and other pollutants result in pond water becoming saturated with excess external nutrients, it becomes murky, and algae starts to form. A skimmer in the arden pond does not even allow surface pollution to make the water murky.


Skimmer Dimensions

Overall Height 300—800mm

Riser Diameter 80mm Base Diameter 350mm

Hose Connection 1½ Inch Taper Filter Basket Volume 1.4 litres 160mm

Water Level Rise & Fall 160mm

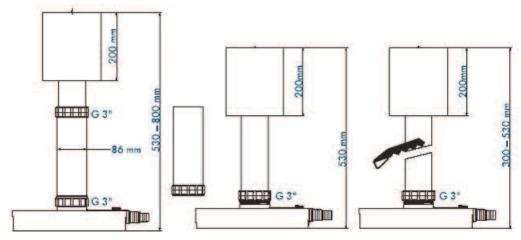

Thainstone Business Park, Inverurie, Aberdeenshire, AB51 5GT Phone 01467 623010 Fax 01467 623011 info@filpumps.co.uk